

# **INSIDER**

### **SURFACE MOUNTING**

Insider is a linear aluminium profile characterized by a backward source that guarantees optimal visual comfort and a defined beam of light. Surface mountable with clips (included), it is used to light the inside of cabinets: the version with integrated PIR sensor allows it to be switched on and off when the door is opened and closed. The LED source is available with Natural (4000K), Warm (3000K) or Emotion Dual Color colour temperature which allows the variation from 3000K to 4000K. On request, the length can be customized up to a maximum of 3 m.










### **INSIDER**



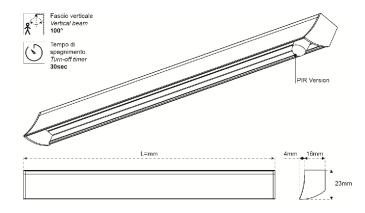

### Finish





Black

Anodized aluminium















• configurable with custom lengths

- supplied with PIR sensor
- available with warm white light

#### **INSIDER**

286000100CN	03 12		4.6W	L 413mm	Natural White	IN: 12 VDC
286000200CN	03 12		6.2W	L 563mm	Natural White	IN: 12 VDC
286000300CN	03 12		9.8W	L 863mm	Natural White	IN: 12 VDC
286000400CN	03 12		13.3W	L 1163mm	Natural White	IN: 12 VDC
286000500CN	03 12	PIR Sensor	4.2W	L 413mm	Natural White	IN: 12 VDC
286000600CN	03 12	PIR Sensor	5.9W	L 563mm	Natural White	IN: 12 VDC
286000700CN	03 12	PIR Sensor	9.4W	L 863mm	Natural White	IN: 12 VDC
286000800CN	03 12	PIR Sensor	13W	L 1163mm	Natural White	IN: 12 VDC

### Power supply and control



### MEC DRIVER

For the selection of the power supply system scan or click the QR code.



### SMART SYSTEM

For the choice of control system (only for lights without integrated controls) scan or click the QR code.




H [cm]	A
30	В
50	Θ
100	<b>O</b>

VERS.	863mm NW
Α°	95°
B - Lux	1300
C - Lux	670
D - Lux	210
LUMEN	421
LUMEN / W	43
CRI	>80

# **EXTENSION CORD**





12VDC





### **EXTENSION CORD 12VDC**

12604220000	03	12 VDC	L 1100mm	IN: 12 VDC
12604230000	03	12 VDC	L 2200mm	IN: 12 VDC

# **CABLE COVER**








### **CABLE COVER**

122089600	01 03	600mm	L 600mm	A
122006200	01 65	1200mm	L 1200mm	A
13201056500	65			В

### **INSIDER EDC**



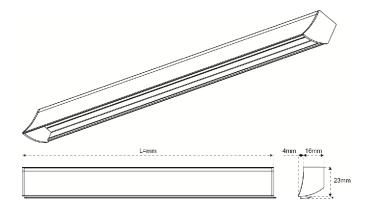

### Finish







Anodized aluminium















· configurable with custom lengths

- supplied with Emotion system: the colour temperature varies from "warm" to "natural"
- supplied with "Emotion Jumper" cable for changing the colour temperature

### **INSIDER EDC**

286000100AGD	03 12		5.2W	L 413mm	3000K÷4000K	IN: 12 VDC
286000200AGD	03 12		7.2W	L 563mm	3000K÷4000K	IN: 12 VDC
286000300AGD	03 12		11.1W	L 863mm	3000K÷4000K	IN: 12 VDC
286000400AGD	03 12		15W	L 1163mm	3000K÷4000K	IN: 12 VDC
286001900AGD	03 12	PIR Sensor	4.6W	L 413mm	3000K÷4000K	IN: 12 VDC
286002000AGD	03 12	PIR Sensor	6.5W	L 563mm	3000K÷4000K	IN: 12 VDC
286002100AGD	03 12	PIR Sensor	10.4W	L 863mm	3000K÷4000K	IN: 12 VDC
286002200AGD	03 12	PIR Sensor	14.3W	L 1163mm	3000K÷4000K	IN: 12 VDC

### Power supply and control



### MEC DRIVER

For the selection of the power supply system scan or click the QR code.



### SMART SYSTEM

For the choice of control system (only for lights without integrated controls) scan or click the QR code.



H [cm]	A
30	В
50	Θ
100	Ð


003IIIII LDC
95°
1350
690
215
447
43
>80

863mm FDC

VERS

# **EXTENSION CORD**





12VDC





### **EXTENSION CORD 12VDC**

12604220000	03	12 VDC	L 1100mm	IN: 12 VDC
12604230000	03	12 VDC	L 2200mm	IN: 12 VDC

# **CABLE COVER**







### **CABLE COVER**

122089600	01 03	600mm	L 600mm	A
122006200	01 65	1200mm	L 1200mm	A
13201056500	65			В