





# LUCKY 2

## SURFACE MOUNTING

Lucky-2 is a square-based under wall spotlight with a reduced thickness (5 mm) that allows maximum versatility of application.



LUCKY 2

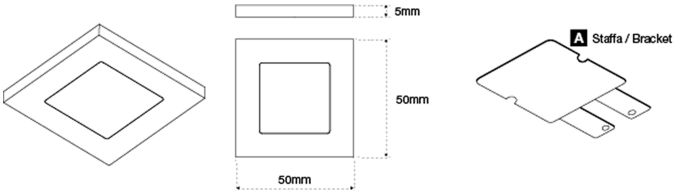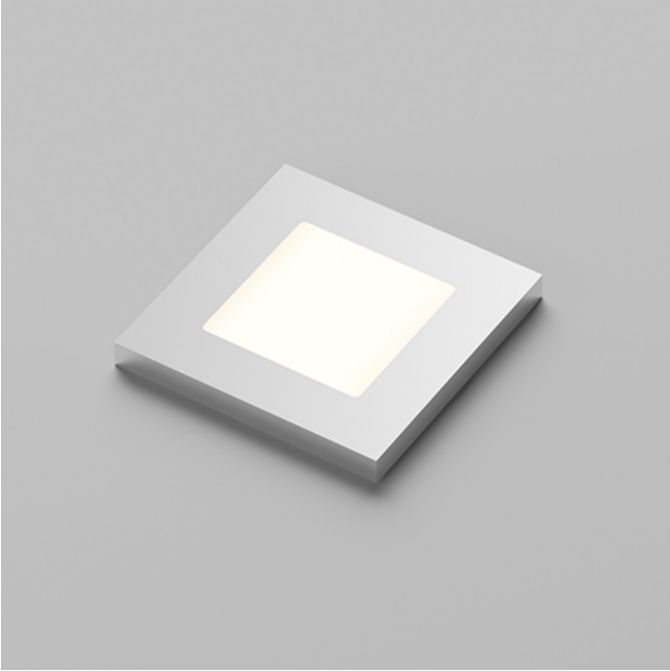



Finish

65  
Metallic grey



- only 5 mm thick
- available with bracket for surface mounting
- optic designed to ensure uniform light diffusion

LUCKY 2

27900026520ZN		2W	L 50mm	W 50mm	Natural White	IN: 12 VDC
1_LUCKY-2		Bracket		A		


Power supply and control



**MEC DRIVER**  
For the selection of the power supply system scan or click the QR code.




**SMART SYSTEM**  
For the choice of control system (only for lights without integrated controls) scan or click the QR code.

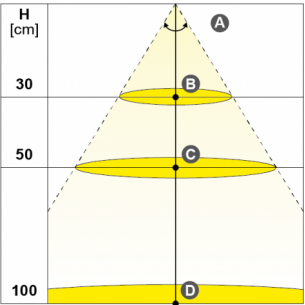

VERS.	NW
A°	75°
B - Lux	300
C - Lux	115
D - Lux	30
LUMEN	84
LUMEN / W	45
CRI	>80

# EXTENSION CORD

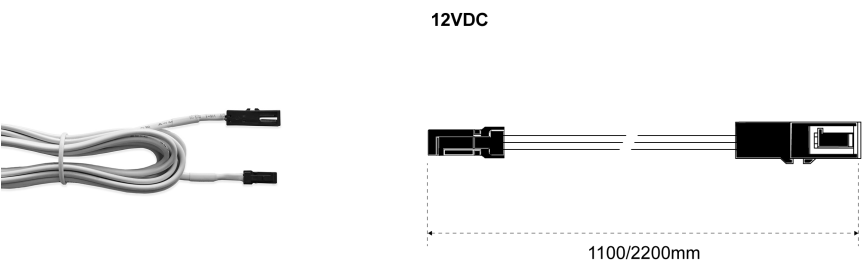

Finish


03

Black

## EXTENSION CORD 12VDC

12604220000	<div><div>03</div></div>	12 VDC	L 1100mm	IN: 12 VDC
12604230000	<div><div>03</div></div>	12 VDC	L 2200mm	IN: 12 VDC

# CABLE COVER

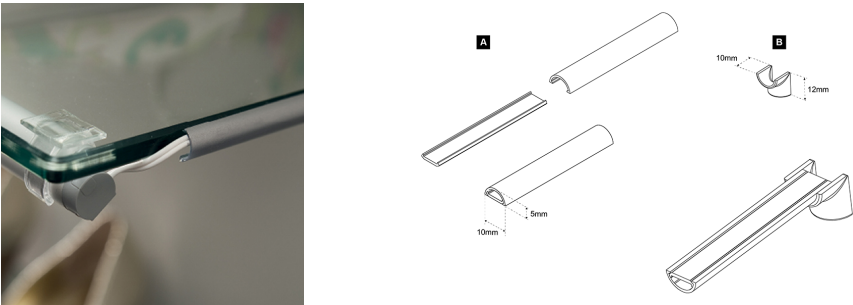

Finish

01

White

03

Black

65

Metallic grey

## CABLE COVER

1220896__00	<div><div>01</div><div>03</div></div>	600mm	L 600mm	A
1220062__00	<div><div>01</div><div>65</div></div>	1200mm	L 1200mm	A
13201056500	<div><div>65</div></div>			B