




MOONLIGHT QT

SURFACE AND RECESSED INSTALLATION

Recessed plastic spotlight with opal polycarbonate diffuser. Available in metallic grey or nickel finishes, it can be used as an under-cabinet or inside-cabinet, where it can be installed recessed or surface-mounted by using the special spacer (not included). The LED source is available in Emotion temperature which allows the variation from 2700K to 6500K.



MOONLIGHT QT

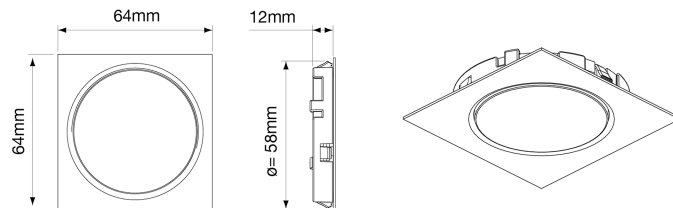













Finish



- available with spacer for surface mounting
- optic designed to ensure uniform light diffusion

MOONLIGHT QT

2140074__20ZW	  		3W	ø 58mm	L 64mm	Warm White	IN: 12 VDC
2140074__20ZN	  		3W	ø 58mm	L 64mm	Natural White	IN: 12 VDC
1241833__00ZW	  	Kit 3 MOONLIGHT QT + Power supply	9W	ø 58mm	L 64mm	Warm White	IN: 12 VDC
1241833__00ZN	  	Kit 3 MOONLIGHT QT + Power supply	9W	ø 58mm	L 64mm	Natural White	IN: 12 VDC

Power supply and control




MEC DRIVER

For the selection of the power supply system scan or click the QR code.



SMART SYSTEM

For the choice of control system (only for lights without integrated controls) scan or click the QR code.

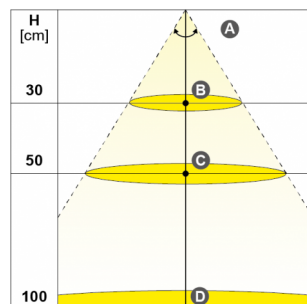


VERS.	NW
A°	80°
B - Lux	670
C - Lux	270
D - Lux	80
LUMEN	180
LUMEN / W	60
CRI	>80

EXTENSION CORD

12VDC



Finish

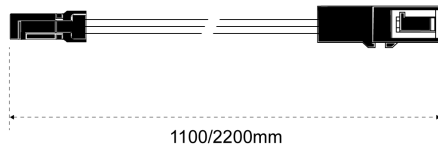

EXTENSION CORD 12VDC

1260422000		12 VDC	L 1100mm	IN: 12 VDC
1260423000		12 VDC	L 2200mm	IN: 12 VDC

CABLE COVER

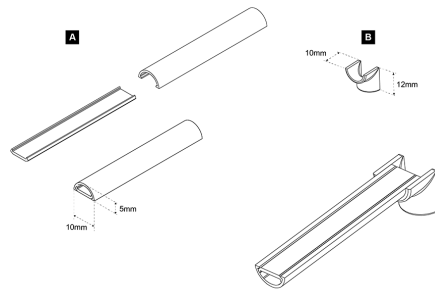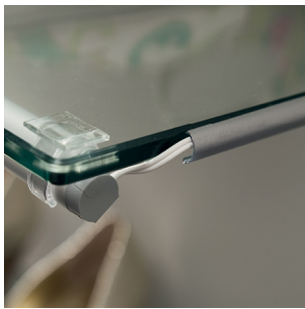


Finish



CABLE COVER

1220896__00		600mm	L 600mm	A
1220062__00		1200mm	L 1200mm	A
13201056500				B

MOONLIGHT QT EDC

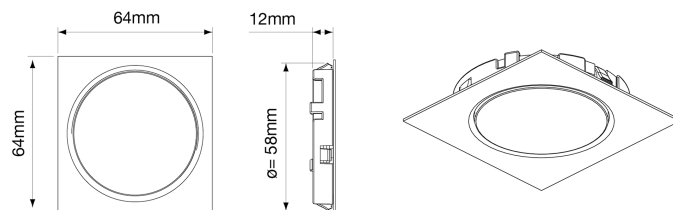

Finish



- available with spacer for surface mounting
- optic designed to ensure uniform light diffusion

- supplied with "Emotion Jumper" cable for changing the colour temperature
- supplied with Emotion system: the colour temperature varies from "warm" to "natural"

MOONLIGHT QT EDC

2140074__20ZD  3W ø 58mm L 64mm 3000K+4000K IN: 12 VDC

Power supply and control




MEC DRIVER

For the selection of the power supply system scan or click the QR code.



SMART SYSTEM

For the choice of control system (only for lights without integrated controls) scan or click the QR code.

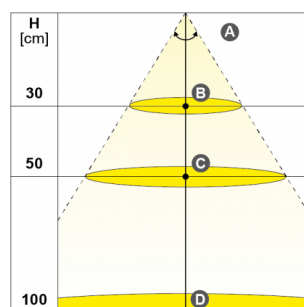


VERS.	EDC
A°	80°
B - Lux	670
C - Lux	270
D - Lux	80
LUMEN	180
LUMEN / W	60
CRI	>80

EXTENSION CORD

12VDC

Finish


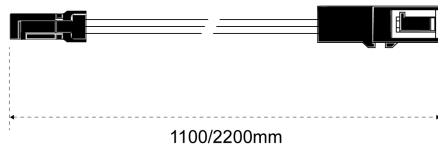


Black

EXTENSION CORD 12VDC

1260422000		12 VDC	L 1100mm	IN: 12 VDC
1260423000		12 VDC	L 2200mm	IN: 12 VDC

CABLE COVER

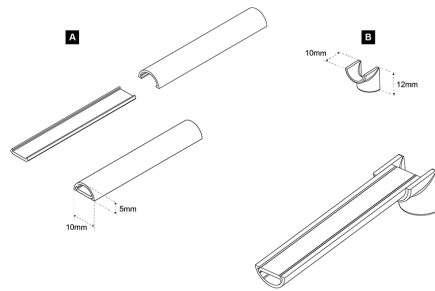

Finish



White



Black






Metallic grey

CABLE COVER

1220896__00		600mm	L 600mm	A
1220062__00		1200mm	L 1200mm	A
13201056500				B

SPACER MOONLIGHT QT

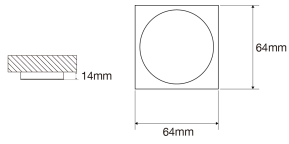

Finish



White



Metallic grey



Nickel

SPACER MOONLIGHT QT

2140078__00



Spacer MOONLIGHT QT

L 64mm W 64mm