




# OSLO2

## RECESSED INSTALLATION

Oslo2 is a lamp under the wall unit in anodized aluminium to be integrated into the structure by fixing it to the side panels. Equipped with IR sensor Proximity switch to manage the ignition of the lamp, it offers a homogeneous emission on the work surface thanks to the LED source, available with Natural (4000K) or Warm (3000K) colour temperature. On request, the length can be customized up to a maximum of 3 m.



OSLO2 12V

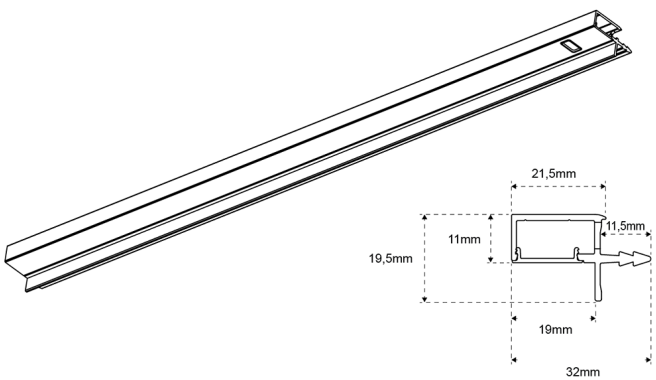

Finish



Anodized aluminium



- IR switch with ON/OFF and colour change functions
- supplied with Emotion system: the colour temperature varies from “warm” to “natural”
- configurable with custom lengths
- available at 24 VDC

OSLO2 12V

29600081200AGD		IRS	3.9W	L 413mm	3000K+4000K	IN: 12 VDC
29600101200AGD		IRS	5.9W	L 563mm	3000K+4000K	IN: 12 VDC
29600121200AGD		IRS	9.8W	L 863mm	3000K+4000K	IN: 12 VDC
29600151200AGD		IRS	13.7W	L 1163mm	3000K+4000K	IN: 12 VDC


Power supply and control



**MEC DRIVER**  
For the selection of the power supply system scan or click the QR code.




**SMART SYSTEM**  
For the choice of control system (only for lights without integrated controls) scan or click the QR code.

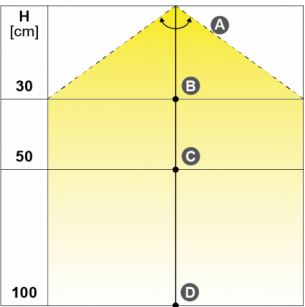


VERS.	563mm EDC
A°	100°
B - Lux	1030
C - Lux	430
D - Lux	125
LUMEN	236
LUMEN / W	40
CRI	>80

# EXTENSION CORD




12VDC

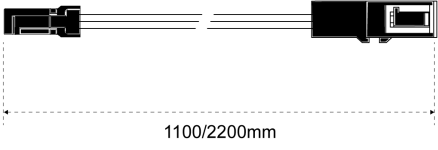

1100/2200mm

Finish




03


Black

## EXTENSION CORD 12VDC


12604220000		12 VDC	L 1100mm	IN: 12 VDC
12604230000		12 VDC	L 2200mm	IN: 12 VDC

# CABLE COVER



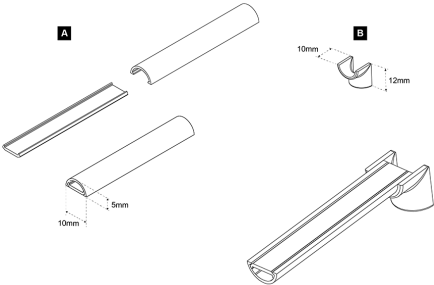


Finish




01

White



03






Black




65

Metallic grey

## CABLE COVER

1220896__00	 	600mm	L 600mm	A
1220062__00	 	1200mm	L 1200mm	A
13201056500				B

OSLO2 24V

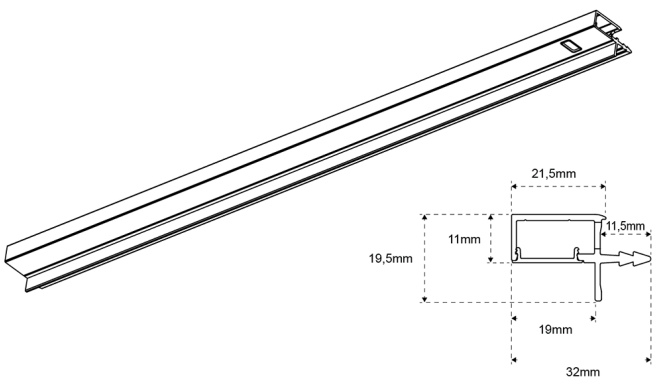

Finish



Anodized aluminium



- IR switch with ON/OFF and colour change functions
- supplied with Emotion system: the colour temperature varies from “warm” to “natural”
- configurable with custom lengths
- available at 24 VDC

OSLO2 24V

29600081200AHD		IRS	3.9W	L 413mm	3000K+4000K	IN: 24 VDC
29600101200AHD		IRS	5.9W	L 563mm	3000K+4000K	IN: 24 VDC
29600121200AHD		IRS	9.8W	L 863mm	3000K+4000K	IN: 24 VDC
29600151200AHD		IRS	13.7W	L 1163mm	3000K+4000K	IN: 24 VDC


Power supply and control



**MEC DRIVER**  
For the selection of the power supply system scan or click the QR code.




**SMART SYSTEM**  
For the choice of control system (only for lights without integrated controls) scan or click the QR code.

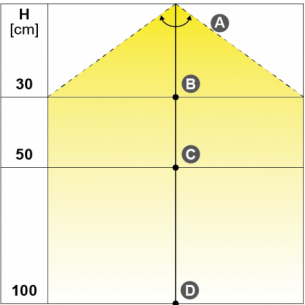


VERS.	563mm EDC
A°	100°
B - Lux	1030
C - Lux	430
D - Lux	125
LUMEN	236
LUMEN / W	40
CRI	>80

EXTENSION CORD




24VDC

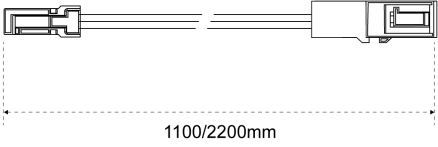

1100/2200mm


Finish




01


White

EXTENSION CORD 24VDC


12604630000		24 VDC	L 1100mm	IN: 24 VDC
12604620000		24 VDC	L 2200mm	IN: 24 VDC

CABLE COVER



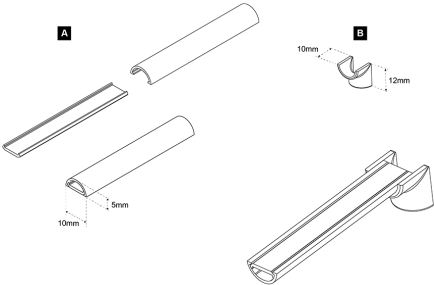


Finish




01

White



03






Black



65

Metallic grey

CABLE COVER

1220896__00	 	600mm	L 600mm	A
1220062__00	 	1200mm	L 1200mm	A
13201056500				B